

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048871 A2

- (51) International Patent Classification⁷: **F28F**
- (21) International Application Number:
PCT/EP2003/013241
- (22) International Filing Date:
25 November 2003 (25.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
02400050.7 25 November 2002 (25.11.2002) - EP
- (71) Applicant and
(72) Inventor: VIDA, Nikolaus [DE/DE]; Am Grabenweg 2,
72516 Scheer (DE).
- (74) Agent: HERDEN, Andreas; Blumbach, Kramer & Partner GbR, Alexandrastrasse 5, 65187 Wiesbaden (DE).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR GENERATING MIXTURES OF FLUIDS IN A BOUNDARY LAYER

(57) Abstract: The invention proposes a method and a device to generate an area of a mixture of fluids by introducing media having at least a different physical or chemical property into a boundary layer of a surface using vortices. The method and the device can be applied to moving vehicles or walls of containers surrounding streaming fluids, the fluids being especially mixtures of gases, liquids or combinations of gases and liquids.

WO 2004/048871 A2

**Method and Device for generating Mixtures of Fluids in a
Boundary Layer**

5 Specification

Field of the Invention

The invention concerns surface areas as boundary layers of
surfaces of moving vehicles or walls of containers
surrounding streaming fluids as mixtures of gases, liquids
10 or combinations of gases and liquids.

Background of the Invention

In various applications flowing media play a significant
role. These applications range from vehicles moving in air
15 or in water to pumping or pipe line systems.

In most cases different media with different properties are
involved. Various methods are known to shape devices with
respect to flowing media so that certain effects are
20 optimised. These methods usually are based on the principle
to avoid the building of vortices in the flowing media.

Summary of the Invention

Therefore, it is an object of the present invention to show
25 a way how the mixture of fluids in a boundary layer of a
surface can be improved.

The object of the invention is achieved in a surprisingly
simple manner by a subject matter of one of the attached

CONFIRMATION COPY

independent claims. Advantageous embodiments and refinements are defined in the respective dependent claims.

5 The invention teaches to use vortices to generate an area of a mixture of fluids by introducing media having at least a different physical or chemical property into a boundary layer of a surface.

10 In a preferred embodiment said different property of said media is reduced friction and said media are comprising gases, preferably air, and gas liquid mixtures.

15 In a further preferred embodiment said vortices are used for sucking bubbles from the surface of a vehicle, especially from the body and/or propeller of a ship, into an area of a vortex having reduced pressure to avoid an increase of cavitation.

20 In case of a propeller, especially in view of different pressure regimes on the both sides and different velocities of the propeller blades vortex generators adapted to the specific requirements of the respective location are used.

25 In a further preferred embodiment media are introduced into said boundary layer from an opening located in said surface or in the vicinity of said surface connecting a source of said media having less friction with the boundary layer.

30 Preferably, said vortices are self organizing tornado-like vortices generated according to a method and a device as claimed in EP 0 679 812 patent or in WO 97/04280. The complete content of EP 0 679 812 and WO 97/04280 is hereby incorporated into this application by reference.

Advantageously, said opening is located in a dimple defined in the surface of said part of said vehicle.

5 Exhaust gases can be used as gases if said opening communicates with an exhaust system of an engine of the vehicle and assists in evacuating exhaust gases.

10 In a further preferred embodiment said opening is in the neighborhood of catalytic substances and promotes a catalytic reaction of exhaust gases.

15 In a most preferred embodiment a plurality of dimples and openings are located at an outer surface of a ship.

To provide an improved performance, said plurality of dimples and openings comprises dimples of different shape adapted to the requirements of a special area of the surface.

20 In a further most preferred embodiment, said surface is part of a pipe line system especially of a petrol, mineral oil or fuel pipe line system and, advantageously, said gas or gas liquid mixture is comprising gases accumulated in
25 the course of petrol exhaustion or production.

The invention further may be used as chemical pump and mixing system if the different physical property is the chemical composition. This pump system provides special
30 advantages especially for systems containing aggressive or radio active components as wear of bearings and other movable parts is drastically reduced.

If the different physical property is the temperature, very reliable cooling systems can be realized.

- 5 In a more general manner the invention also teaches using said low pressure area of said vortices as a pumping means for pumping media from a higher to a lower pressure regime.

- As a consequence of this more general aspect of the
10 invention use as a nautical pump out system is proposed.

- The inventive device uses vortices to generate an area of a mixture of fluids by introducing media having at least a different physical or chemical property into a boundary
15 layer of a surface.

- Advantageously the different physical or chemical property of the media is reduced friction and the media are comprising gases, preferably air, and gas liquid mixtures.
20

- With special advantage the inventive device comprises means to suck bubbles from a surface into an area of a vortex having reduced pressure. Preferably the device comprises a being part is the surface of a vehicle, especially from the
25 body and/or propeller of a ship. Any surface of any vehicle, along which at least one medium is flowing, also lies within the scope of the invention. The great advantage of means to suck bubbles from a surface into an area of a vortex having reduced pressure is that an increase of
30 cavitation is avoided by that.

Preferably the device comprises means for introduction of the media into the boundary layer of a surface from an

opening located in said surface or in the vicinity of said surface connecting a source of at least one medium with the boundary layer, preferably a source of said media having less friction.

5

With advantage the vortices generated by the device are self organizing tornado-like vortices. Self organizing tornado-like vortices can be generated according to a method and a device as claimed in EP 0 679 812 or in WO 97/04280.

10

With advantage the device comprises a surface with at least one opening located in at least one dimple defined in the surface, providing for the introduction of the media into the boundary layer of the surface from the opening, said surface being a surface of a vehicle or part of a vehicle.

15

Preferably said opening communicates with an exhaust system of an engine of a vehicle and assists in evacuating exhaust gases. With advantage said opening can be located in the neighborhood of catalytic substances, thus promoting a catalytic reaction of exhaust gases.

20

Advantageously said surface comprises a plurality of dimples and openings located at an outer surface of a vehicle, preferably a ship. The plurality of dimples and openings comprise preferably dimples of different shape adapted to the requirements of a special area of the surface.

25

30

It also lies within the scope of the invention to provide means in the device to exert electrical, magnetical and/or mechanical influences, by which vortices are generated.

The device can also be part of a pipe line system, especially of a petrol, mineral oil or fuel pipe line system. The mixture of fluids generated by the device by
5 means of the vortices can be a gas or gas liquid mixture, preferably comprising gases accumulated in the course of petrol exhaustion or production.

The at least different physical or chemical property of the
10 media can be preferably the chemical composition, the device being a chemical pump or mixing system or part thereof. An inventive pump system provides special advantages especially for systems containing aggressive or radio active components as wear of bearings and other
15 movable parts is drastically reduced.

The at least different physical or chemical property of the media can also be preferably the temperature. In this case the device can be a cooling or air conditioning system.
20

Through the vortices medium flows in certain directions are built in the vicinity of the boundary layer of the surface, leading to a transport of bubbles or other particles away from the surface. This effect can also be very advantageous
25 in cooling or air conditioning system, since freezing can be reduced.

The media differing in any other physical or chemical property can also be suitable for certain applications.
30

The device can also be a pump system or part thereof. A low pressure area generated by means of the vortices is in this case used as a pumping means for pumping media from a

higher to a lower pressure regime. Further the device can also be a nautical pump out system or part thereof.

5 Detailed Description of the Invention

The invention together with several preferred embodiments will be better understood from the belowstanding detailed description in conjunction with the attached drawings wherein it is shown in:

10

Fig. 1: a surface with dimples having openings with different media on the two sides of the surface

Fig. 2: a top view of a surface with dimples having openings

15

Fig. 3: a preferred distribution of dimples

Fig. 4: a cross section through a surface with dimples having openings

Fig. 5: a part of a pipe line system comprising dimples on the inner surface

20

Fig. 1 shows a surface 10 which is provided with dimples 20 having an opening 30. By means of the openings 30 the first side 41 and the second side 42 of the surface 10 are connected. Along the first side 41 of the surface 10 a first medium flows in the direction indicated by the arrow 50.

25

By means of the dimples 20 vortices are built in the boundary layer of the flowing first medium. The vortices generate an area of low pressure in the vicinity of the dimples 20.

30

That way a second medium, which is provided on the second side 42 of the surface 10 and has at least a different physical or chemical property with respect to the first medium, is sucked through the opening 30 to the first side 41 of the surface, thus generating an area of a mixture of the first and the second medium in the boundary layer of surface 10.

In Fig. 2 a possible distribution of dimples 20 on a surface 10 having openings 30 is shown schematically. In this embodiment the dimples 20 have an oval outline in the shown top view. In the cross section of the surface 10 the dimples 20 show concavities and convexities. Various other shapes of the dimples 20 also lie within the scope of the invention.

Fig. 3 shows a further preferred distribution of dimples on a surface. The dimples 20 in this embodiment have a circular outline and are arranged periodically on a surface. By the centers of three neighboring dimples an equilateral triangle is formed, angle α thus being 60° . The distance of the centers of two neighboring dimples 20 is t_2 , the distance between two consecutive rows of dimples 20 is t_1 . The values of t_1 and t_2 can vary depending on the application. The dimples 20 can be provided with openings connecting the two sides of the surface not shown in Fig. 3.

A cross section of a surface provided with dimples is shown schematically in Fig. 4. The dimple 20 in this embodiment shows a spherical surface with radius R_1 , which is rounded at the edges by radii-forming with radius R_2 , and has a height h and a diameter d . The dimples 20 in this example

are symmetrical with respect to rotation with a rotation axis through the center of the dimple 20. The dimple 20 is located on a first side 41 of the surface 10 and is provided with an opening in the center adjoining a channel 30 by which a connection to the second side 42 of the surface is achieved.

The channel 30 is formed so that a second medium located on the second side 42 of the surface 10 can easily be sucked through the channel 30 to the first side 41 of the surface, when a first medium flows on the first side 41 of the surface in the direction indicated by arrow 50.

Fig. 5 shows a tube 60 which can be part of a pipe line system, especially of a petrol, mineral oil or fuel pipe line system. The tube 60 is provided with dimples 20 on the inner surface 10. The dimples may be provided with openings connecting the inside and outside area of the tube 60.

Claims

1. Method using vortices to generate an area of a mixture of fluids by introducing media having at least a
5 different physical or chemical property into a boundary layer of a surface.
2. Method according to claim 1, characterized in that said different property of said media is reduced friction
10 and said media are comprising gases, preferably air, and gas liquid mixtures.
3. Method according to claim 1 or 2, characterized by sucking bubbles from the surface of a vehicle, especially
15 from the body and/or propeller of a ship, into an area of a vortex having reduced pressure to avoid an increase of cavitation.
4. Method according to claim 1 or 2, characterized in that
20 said media are introduced into said boundary layer from an opening located in said surface or in the vicinity of said surface connecting a source of said media having less friction with the boundary layer.
- 25 5. Method according to claim 1, 2 or 4, characterized in that said vortices are self organizing tornado-like vortices generated according to a method and a device as claimed in EP 0 679 812 patent or in WO 97/04280.
- 30 6. Method according to claim 4, characterized in that said opening is located in a dimple defined in the surface of said part of said vehicle.

7. Method according to one of the preceding claims,
characterized in that said opening communicates with an
exhaust system of an engine of the vehicle and assists in
5 evacuating exhaust gases.

8. Method according to claim 7, characterized in that
said opening is in the neighborhood of catalytic substances
and promotes a catalytic reaction of exhaust gases.

10

9. Method according to any of the preceding claims
characterized by a plurality of dimples and openings
located at an outer surface of a ship.

15

10. Method according to claim 8, characterized in that
said plurality of dimples and openings comprises dimples of
different shape adapted to the requirements of a special
area of the surface.

20

11. Method according to claim 10, characterized in that
said vortices are generated by means of electrical,
magnetical and/or mechanical influences.

25

12. Method according to one of the preceding claims,
characterized in that said surface is part of a pipe line
system especially of a petrol, mineral oil or fuel pipe
line system.

30

13. Method according to claim 10, characterized in that
said gas or gas liquid mixture is comprising gases
accumulated in the course of petrol exhaustion or
production.

14. Method according to one of the preceding claims characterized in that the different physical property is the chemical composition.

5

15. Method according to one of the preceding claims characterized in that the different physical property is the temperature.

10

16. Method according to one of the preceding claims comprising using said low pressure area of said vortices as a pumping means for pumping media from a higher to a lower pressure regime.

15

17. Method according to one of the preceding claims used as a nautical pump out system.

20

18. Device using vortices to generate an area of a mixture of fluids by introducing media having at least a different physical or chemical property into a boundary layer of a surface.

25

19. Device according to claim 18, characterized in that said different property of said media is reduced friction and said media are comprising gases, preferably air, and gas liquid mixtures.

30

20. Device according to claim 1 or 2, characterized by sucking bubbles from the surface of a vehicle, especially from the body and/or propeller of a ship, into an area of a vortex having reduced pressure to avoid an increase of cavitation.

21. Device according to claim 18 or 19, characterized in that said media are introduced into said boundary layer from an opening located in said surface or in the vicinity
5 of said surface connecting a source of said media having less friction with the boundary layer.

22. Device according to claim 18, 19 or 21, characterized in that said vortices are self organizing tornado-like
10 vortices generated according to a method and a device as claimed in EP 0 679 812 patent or in WO 97/04280.

23. Device according to claim 22, characterized in that said opening is located in a dimple defined in the surface
15 of said part of said vehicle.

24. Device according to one of the preceding claims, characterized in that said opening communicates with an exhaust system of an engine of the vehicle and assists in
20 evacuating exhaust gases.

25. Device according to claim 24, characterized in that said opening is in the neighborhood of catalytic substances and promotes a catalytic reaction of exhaust gases.
25

26. Device according to any of the preceding claims characterized by a plurality of dimples and openings located at an outer surface of a ship.

30 27. Device according to claim 25, characterized in that said plurality of dimples and openings comprises dimples of different shape adapted to the requirements of a special area of the surface.

28. Device according to one of the preceding claims,
characterized in that said surface is part of a pipe line
system especially of a petrol, mineral oil or fuel pipe
5 line system.

29. Device according to claim 27, characterized in that
said gas or gas liquid mixture is comprising gases
accumulated in the course of petrol exhaustion or
10 production.

30. Device according to one of the preceding claims
characterized in that the different physical property is
the chemical composition.
15

31. Device according to one of the preceding claims
characterized in that the different physical property is
the temperature.

20 32. Device according to one of the preceding claims
comprising using said low pressure area of said vortices as
a pumping means for pumping media from a higher to a lower
pressure regime.

25 33. Device according to one of the preceding claims used
as a nautical pump out system.

Fig. 1

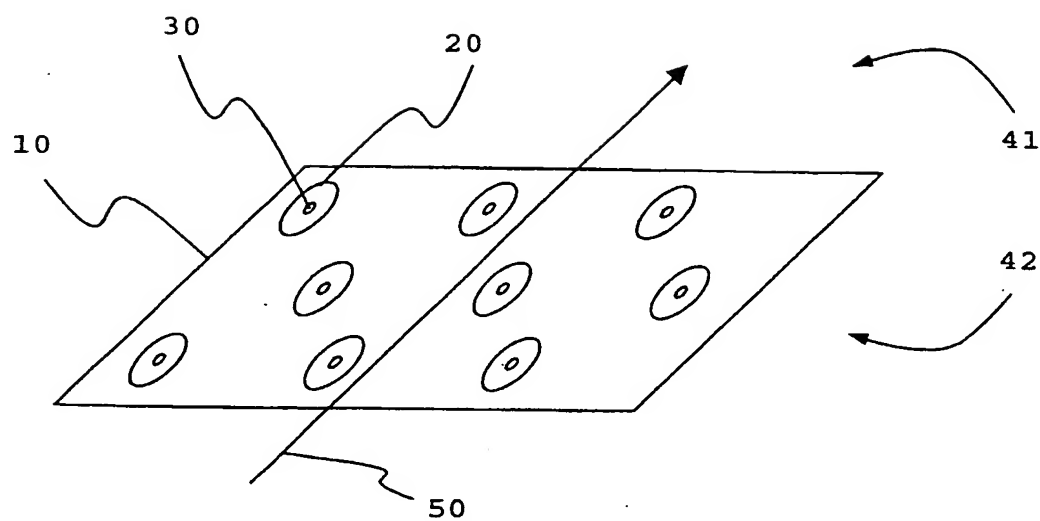


Fig. 2

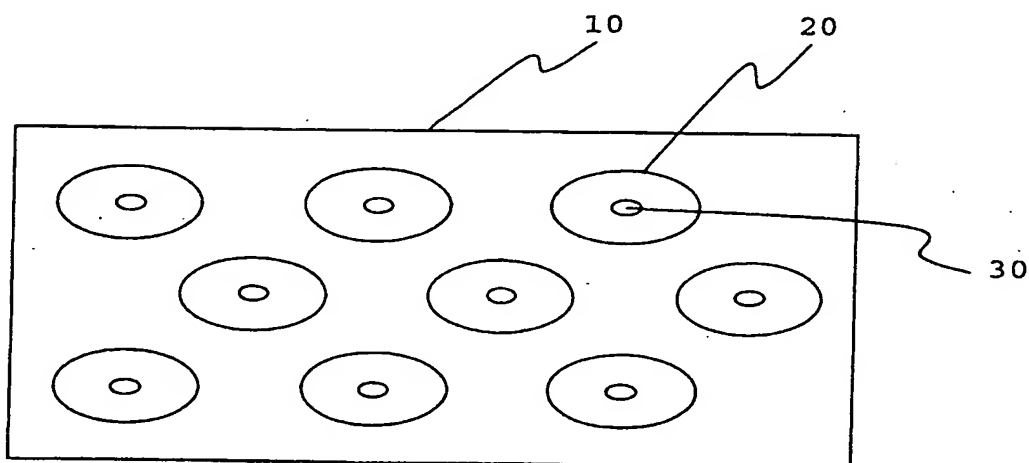


Fig. 3

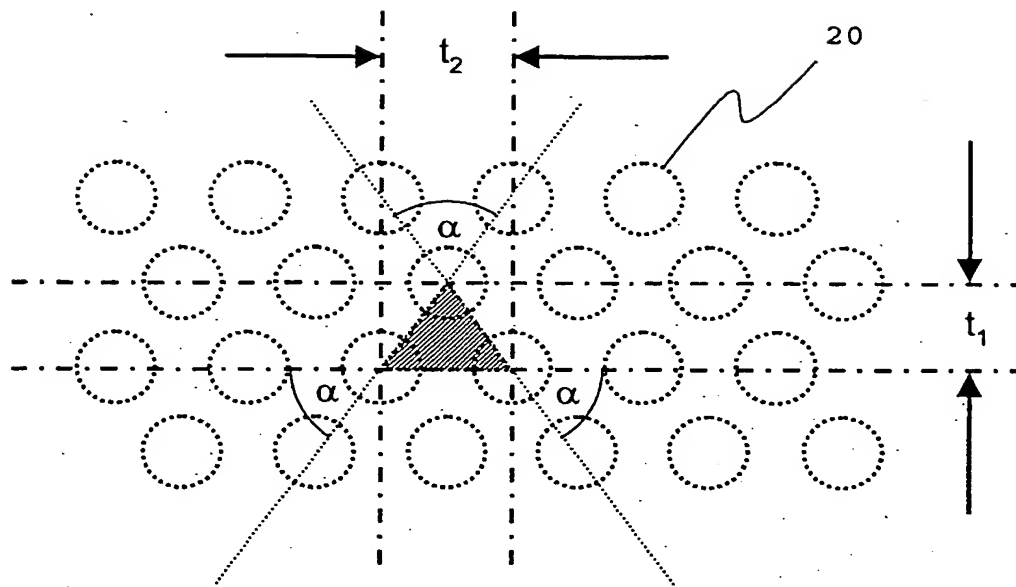


Fig. 4


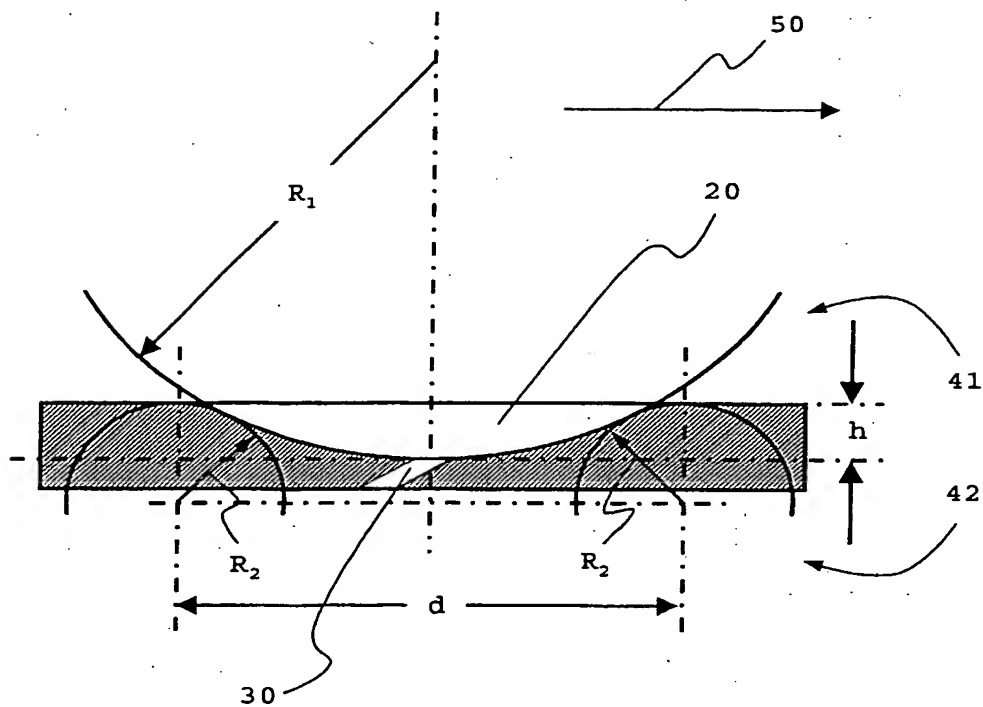


Fig. 5



(19) World Intellectual Property
Organization
International Bureau

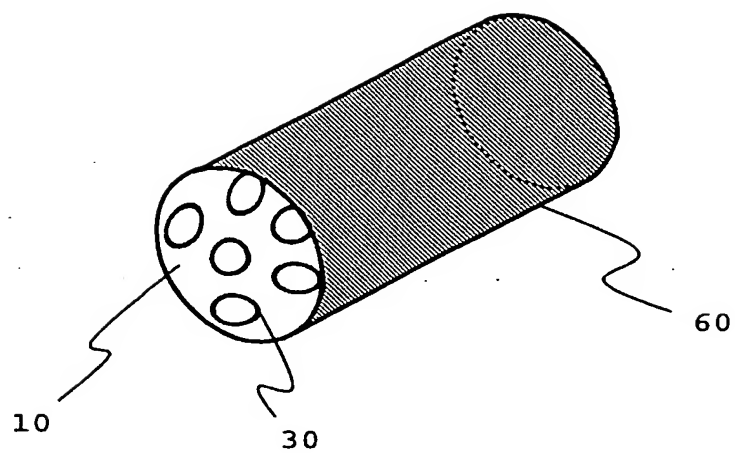

(43) International Publication Date
10 June 2004 (10.06.2004)

PCT

(10) International Publication Number
WO 2004/048871 A3

(51) International Patent Classification⁷: F15D 1/06, 1/12

(21) International Application Number:
PCT/EP2003/013241

(22) International Filing Date:
25 November 2003 (25.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02400050.7 25 November 2002 (25.11.2002) EP

(71) Applicant and

(72) Inventor: VIDA, Nikolaus [DE/DE]; Am Grabenweg 2,
72516 Scheer (DE).

(74) Agent: HERDEN, Andreas; Blumbach, Kramer & Part-
ner GbR, Alexandrastrasse 5, 65187 Wiesbaden (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR,
CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD,

GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU,
SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(88) Date of publication of the international search report:
29 July 2004

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND DEVICE FOR GENERATING MIXTURES OF FLUIDS IN A BOUNDARY LAYER

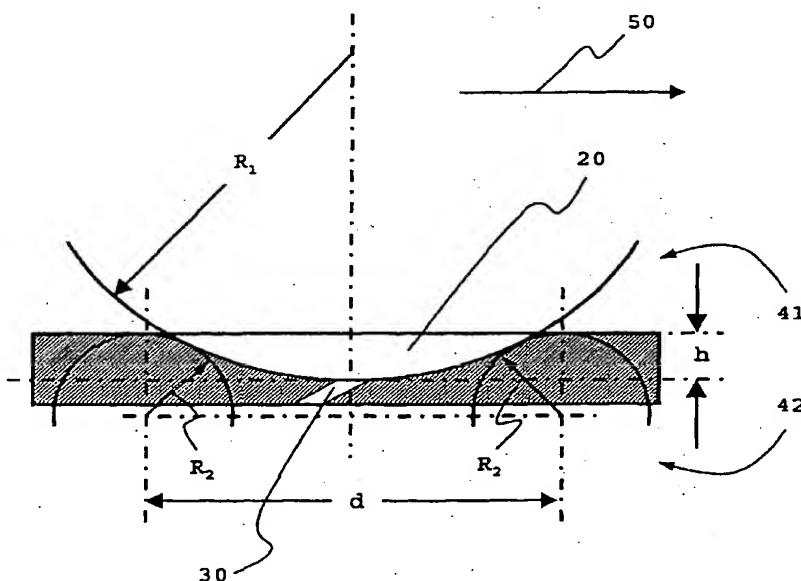

(57) Abstract: The invention proposes a method and a device to generate an area of a mixture of fluids by introducing media having at least a different physical or chemical property into a boundary layer of a surface using vortices. The method and the device can be applied to moving vehicles or walls of containers surrounding streaming fluids, the fluids being especially mixtures of gases, liquids or combinations of gases and liquids.

WO 2004/048871 A3

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP 03/13241

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 F15D1/06 F15D1/12

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F15D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 349 734 B1 (BABENKO VICTOR V) 26 February 2002 (2002-02-26) column 1, line 50 -column 1, line 64 column 3, line 16 -column 3, line 55	1-33
X	US 5 803 409 A (KEEFE LAURENCE R) 8 September 1998 (1998-09-08) column 2, line 54 -column 2, line 67; figures 3B,5 column 4, line 60 -column 4, line 66	1-33
X	US 6 371 414 B1 (HAMSTRA JEFFREY W ET AL) 16 April 2002 (2002-04-16) column 5, line 66 -column 6, line 29; figures 2C,2D --- -/-	1-33

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the international filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

Z document member of the same patent family

Date of the actual completion of the international search

27 May 2004

Date of mailing of the international search report

04/06/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Toffolo, O

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/13241

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 932 612 A (BLACKWELDER RON F ET AL) 12 June 1990 (1990-06-12) column 2, line 49 -column 2, line 60 column 7, line 27 -column 7, line 63; figures 16-18 -----	1-33
X	US 5 445 095 A (BUSHNELL DENNIS M ET AL) 29 August 1995 (1995-08-29) column 2, line 50 -column 2, line 68 column 3, line 20 -column 3, line 32 -----	1-33
X	WO 97/04280 A (VIDA NIKOLAUS ;KIKNADZE GENNADY IRAKLEVICH (RU); OLEINIKOV VALERY) 6 February 1997 (1997-02-06) cited in the application page 12, last paragraph page 14, paragraph 5 -----	1-33
A	EP 0 679 812 A (OLEINIKOV VALERY GRIGORIEVICH ;GACHECHILADZE IVAN ALEXANDROVI (RU)) 2 November 1995 (1995-11-02) cited in the application the whole document -----	1-33

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/13241

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6349734	B1	26-02-2002	US 6305399 B1	23-10-2001
			US 6138704 A	31-10-2000
			US 2002002994 A1	10-01-2002
			CA 2356951 A1	06-07-2000
			EP 1140335 A2	10-10-2001
			JP 2002533208 T	08-10-2002
			NO 20013272 A	29-08-2001
			WO 0038824 A2	06-07-2000
			US 6237636 B1	29-05-2001
			US 2002003002 A1	10-01-2002
US 5803409	A	08-09-1998	NONE	
US 6371414	B1	16-04-2002	AU 6217200 A	05-02-2001
			EP 1198675 A1	24-04-2002
			WO 0106134 A1	25-01-2001
			US 6682021 B1	27-01-2004
US 4932612	A	12-06-1990	NONE	
US 5445095	A	29-08-1995	NONE	
WO 9704280	A	06-02-1997	AU 6701596 A	18-02-1997
			CN 1196790 A ,C	21-10-1998
			DE 69620185 D1	02-05-2002
			DE 69620185 T2	07-11-2002
			WO 9704280 A1	06-02-1997
			EP 0839309 A1	06-05-1998
			ES 2172673 T3	01-10-2002
			US 6119987 A	19-09-2000
EP 0679812	A	02-11-1995	RU 2020304 C1	30-09-1994
			DE 69226711 D1	24-09-1998
			DE 69226711 T2	25-03-1999
			EP 0679812 A1	02-11-1995
			AU 1974292 A	08-11-1993
			ES 2122998 T3	01-01-1999
			WO 9320355 A1	14-10-1993
			SG 47069 A1	20-03-1998
			US 6006823 A	28-12-1999